

町道 水越線 法面改修工事						
数 量 総 括 表 (1/2)						
工 種	種 別	細 目	単位	計上過程の数値	設計計上数値	摘 要
土 工	掘 削	砂質土	m3	19.5	20	計第 1 表
	盛 土	盛土	m3	16.9	20	計第 2 表
	残 土	砂質土	m3	6.3	6	土量配分表
植 生 工	盛土法面整形		m2	67.5	70	計第 3 表
	人工張芝		m2	67.5	70	〃
作業土工						
	床 掘	砂質土	m3	10.7	10	計第 4 表
	埋 戻	砂質土	m3	4.6	5	〃
ふとん竈工	ふとん竈	L-W1200-H500	m	22.0	22	計第 5 表
		(L2000)	(枚)	(8.0)	(8)	設計図
		(L3000)	(枚)	(2.0)	(2)	〃
	吸出防止材	t=10	m2	27.6	28	計第 5 表
	杉丸太	末口 9cm	本	11.00	11	〃
水 路 工	角フリューム設置	KF-200	m	22.0	22	計第 6 表
	分水溝設置	(KF-200)	m	1.0	1	〃
	角フリュームパット		枚	12.0	12	
	基礎碎石	RC-40 t=10cn	m2	8.28	8	L W (22.0+1.0)×0.36
	暗渠排水	300×200	m	23.2	23	計第 6 表
	フィルター材	単粒度碎石4号	m3	1.3	1	L A 23 ×0.056
構造物取壊工	既設水路撤去	KF-200及び 分水溝	m	23.0	23	計第 7 表
		KF-200 0.082t	m3	(0.36)	(0.4)	11本×0.082/2.5
		分水溝 0.054t	m3	(0.0216)	(0.02)	0.054/2.5
		取壊し	m3	0.38	0.4	0.36+0.0216
		Co処分(有筋)	t	1.0	1.0	0.902+0.054

町道 水越線
道路改修工事

数 量 総 括 表

(2/2)

工 種	種 別	細 目	単位	計上過程の数値	設計計上数値	摘 要
仮設工	仮設工事用道路	敷鉄板 3.048×1.524	m	46.0	46	計第 8 表
		設置撤去	m2	140.2	140	3.048×46
		敷鉄板賃料	枚	30.2	31	46/1.524
		仮設材質量	t	24.862	24.900	0.802t/枚
	交通誘導警備員B		人日	10.0	10.0	

土 工 配 分 表

〈 本 工 事 〉

掘 削

掘削工（土砂）： 19.5 m³

$$\begin{array}{rcl} 16.9 & \times & 1/0.90 \\ = & 18.8 & \text{m}^3 \end{array}$$

盛 土

盛 土： 16.9 m³

$$\begin{array}{rcl} 5.6 & + & 19.5 \\ & - & 18.8 \\ & = & 6.3 \end{array}$$

土砂

床堀・埋戻

床堀（土砂）： 10.7 m³

埋戻（土砂）： 4.6 m³

$$\begin{array}{rcl} 10.7 & - & 4.6 \\ & \times & 1/0.90 \\ = & 5.6 & \text{m}^3 \end{array}$$

盛土合計 16.9 m³

残 土

土 砂 6.3 = 6.3 m³

[illegible]

計第2表					土工				計算書			
測点	盛土											
	距離(m)	断面	平均	立積(㎥)				積				積
		0.0										
SECT0.0	2.1	1.2	0.60	1.3								
SECT6.0	4.9	1.6	1.40	6.9								
SECT12.0	5.3	1.3	1.45	7.7								
	0.8	1.3	1.30	1.0								
合計	13.1			16.9	0.0			0.0	0.0			0.0

計 第 3 表 植生工 計 算 書												
測 点	盛土法面整形				人工張芝							
	距離(m)	斜 長	平 均	平積(m ²)	距離(m)	斜 長	平 均	平積(m ²)				積
SECT0.0		0.0				0.0						
	1.1	6.1	3.05	3.4	1.1	6.1	3.05	3.4				
	1.0	6.1	6.10	6.1	1.0	6.1	6.10	6.1				
		0.0				0.0						
	0.5	5.2	2.60	1.3	0.5	5.2	2.60	1.3				
	2.0	5.3	5.25	10.5	2.0	5.3	5.25	10.5				
		4.9				4.9						
	1.9	4.9	4.90	9.3	1.9	4.9	4.90	9.3				
		4.0				4.0						
	1.2	4.0	4.00	4.8	1.2	4.0	4.00	4.8				
SECT6.0	0.4	0.0	2.00	0.8	0.4	0.0	2.00	0.8				
	0.4	4.1	2.05	0.8	0.4	4.1	2.05	0.8				
	5.4	4.2	4.15	22.4	5.4	4.2	4.15	22.4				
SECT12.0	0.2	0.0	2.10	0.4	0.2	0.0	2.10	0.4				
	0.2	4.2	2.10	0.4	0.2	4.2	2.10	0.4				
	0.9	4.2	4.20	3.8	0.9	4.2	4.20	3.8				
		5.0				5.0						
	1.4	0.0	2.50	3.5	1.4	0.0	2.50	3.5				
合計	16.6			67.5				67.5				

計 第 4 表					土 工				計 算 書			
測 点	床 堀				埋 戻							
	距離(m)	断 面	平 均	立積(m³)	距離(m)	断 面	平 均	立積(m³)				積
		0.2				0.1						
SECT0.0	10.8	0.2	0.20	2.2	10.8	0.1	0.10	1.1				
		0.8				0.3						
SECT6.0	4.9	0.7	0.75	3.7	4.9	0.3	0.30	1.5				
SECT12.0	5.2	0.8	0.75	3.9	5.2	0.3	0.30	1.6				
	0.8	0.8	0.80	0.6	0.8	0.3	0.30	0.2				
		0.2				0.1						
	1.5	0.2	0.20	0.3	1.5	0.1	0.10	0.2				

計 第 5 表					ふとん簞工				計 算 書			
測 点	ふとん簞				吸出防止材				杉丸太			
	距 離	段	平 均	延長(m)	距 離	巾	平 均	平積(㎡)				本 数
SECT0.0		2.0				2.5						
SECT6.0	4.9	2.0	2.00	9.8	4.9	2.5	2.50	12.3				5.0
SECT12.0	5.3	2.0	2.00	10.6	5.3	2.5	2.50	13.3				5.0
	0.8	2.0	2.00	1.6	0.8	2.5	2.50	2.0				1.0
合計	11.0			22.0	11.0			27.6	0.0			11.0

計 第 6 表 延長調書 計 算 書												
測 点	KF-200				分水溝 (KF-200)				暗渠排水			
	距離 (m)			延 長	距離 (m)			延 長	距離 (m)			延 長
SECT0.0	10.8			10.8								
SECT6.0	4.8			4.8								
	0.4			0.4								
					1.0			1.0				
SECT12.0	3.7			3.7								
	2.3			2.3								
SECT0.0									10.8			10.8
SECT6.0									4.9			4.9
SECT12.0									5.2			5.2
									2.3			2.3
合計				22.0				1.0				23.2


計 第 7 表					取壊し工				計 算 書			
測 点	既設水路撤去 (KF-200・分水溝)											
	距離 (m)			延 長				積				積
SECT0.0	10.8			10.8								
SECT6.0	4.8			4.8								
SECT12.0	5.1			5.1								
	2.3			2.3								

[illegible]

数量根拠図

暗渠排水工・KF-200 S=1:10

床掘 A = 0.2

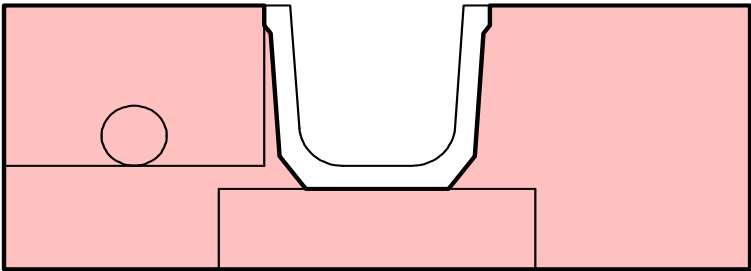

埋戻 A = 0.1

