

町道 青山陰地線
数量総括表

(1/3)

工 種	種 別	細 目	単位	計上過程の数値	設計計上数値	摘 要
作業土工	床 掘	砂質土	m3	17.6	20	計第 1 表
	埋 戻	砂質土	m3	11.6	10	〃
	残 土	砂質土 (運搬距離L=11.0)	m3	4.7	5	土量配分表
水 路 工	自由勾配側溝	H400 L=1.00	m	1.00	1.0	計第 2-1表 及び設計図より
	〃	H400 L=2.00	m	2.00	2.0	〃
		H400 (L1.40/1.43)	m	1.42	1.0	〃
	〃	H500 L=1.00	m	1.00	1.0	計第 2-2表 及び設計図より
		H500 L=2.00	m	6.00	6.0	〃
	〃	H500 (L1.62/1.69)	m	1.65	2.0	〃
	〃	H500 (L1.94/2.00)	m	1.97	2.0	計第 2-3 表 及び設計図より
	〃	H600 L=2.00	m	4.00	4.0	〃
	〃	H700 L=1.00	m	1.00	1.0	〃
	〃	H700 L=2.00	m	2.00	2.0	計第 2-4 表 及び設計図より
	〃	H800 L=2.00	m	2.00	2.0	〃
	インバート コンクリート	18N/mm2	m3	0.686	0.69	計第 2-5 表 及び設計図より
	均しコンクリート	t=5cn 18N/mm2	m2	14.400	14.40	計第 2-5 表 L×0.60
	均し型枠	一般	m2	2.40	2.4	〃 L×0.05×2
	基礎碎石	RC-40 t=10cn	m2	14.400	14.40	〃 L×0.60
	コンクリート蓋	T-25 L=0.50	枚	17	17	計第 2-6 表
	グレーチング蓋	T-25 L=0.50	枚	4	4	〃
	プレキャスト側溝	PU3-B250-H250	m	23.50	24.0	計第 3 表
	敷モルタル	1 : 3	m3	0.212	0.212	〃 L×0.009
	目地モルタル	1 : 3	m3	0.005	0.005	〃 L×0.0002
	基礎碎石	RC-40 t=10cn	m2	11.750	11.75	〃 L×0.50
	コンクリート蓋	PC4-B250	枚	39	39	計第 3 表
	グレーチング蓋	T-25 L=1.00	枚	4	4	〃

町道 青山陰地線
数量総括表

(2/3)

工 種	種 別	細 目	単位	計上過程の数値	設計計上数値	摘 要
擁壁工	継手工					
	コンクリート	18N/mm2	m3	0.196	0.20	計第 4-1 表 及び設計図より
	型 枠	一般	m2	2.16	2.0	〃
	コンクリート復旧					
	コンクリート	18N/mm2	m3	0.041	0.04	計第 4-1 表 及び設計図より
	型 枠	一般	m2	0.73	0.7	〃
	止水壁					
	コンクリート	18N/mm2	m3	0.006	0.01	計第 4-1 表 及び設計図より
	型 枠	一般	m2	0.12	0.1	〃
	埋戻しコンクリート					
	コンクリート	18N/mm2	m3	0.012	0.01	計第 4-2 表 及び設計図より
	型 枠	一般	m2	0.16	0.2	〃
間 詰 工	間詰コンクリート1	18N/mm2	m3	2.317	2.32	計第 5 表
	間詰コンクリート2	18N/mm2	m3	2.066	2.07	〃
	間詰コンクリート3	18N/mm2	m3	0.266	0.27	〃
		(合計)	(m3)	(4.649)	(5.00)	
	型 枠	一般	m2	0.102	0.1	計第 5 表
舗 装 工	表層工	アスファルト t=5cm	m2	57.4	57	計第 6 表
	上層路盤工	M-30 t=10cm	m2	17.0	17	〃
	下層路盤工	RC-30 t=10cm	m2	17.0	17	〃

(3/3)

[illegible]

土 工 配 分 表

〈 本 工 事 〉

掘 削

掘削工（土砂）： m³

$$\times 1/0.90 \\ = 0.0 \text{ m}^3$$

盛 土

盛 土： m³

床堀・埋戻

床堀（土砂）： 17.6 m³

埋戻（土砂）： 11.6 m³

$$17.6 - 11.6 \times 1/0.90 \\ = 4.7 \text{ m}^3$$

$$4.7 + 0.0 - 0.0 = 4.7$$

土砂


残 土

土 砂 4.7 = 4.7 m³


盛土合計 0.0 m³

計第1表					土工				計算書			
測点	床堀				埋戻							
	距離(m)	断面	平均	立積(㎡³)	距離(m)	断面	平均	立積(㎡³)	距離(m)	巾	平均	平積(㎡²)
SECT0.0		0.5				0.3						
SECT11.0	11.0	0.6	0.55	6.1	11.0	0.2	0.25	2.8				
SECT20.6	9.6	0.3	0.45	4.3	9.6	0.4	0.30	2.9				
"		1.2				0.9						
SECT24.4	3.8	1.3	1.25	4.8	3.8	1.0	0.95	3.6				
SECT25.9						0.1						
SECT28.0					2.1	0.1	0.10	0.2				
SECT33.0		0.1			5.0	0.1	0.10	0.5				
SECT49.0	16.0	0.2	0.15	2.4	16.0	0.1	0.10	1.6				
合計	40.4			17.6				11.6				0.0

SECT 24. 4

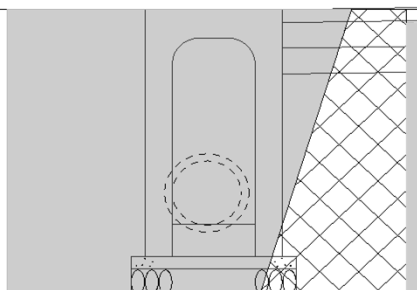


床堀 = 1.3
CO取壊し = 0.4
AS剥取(W) = 1.0

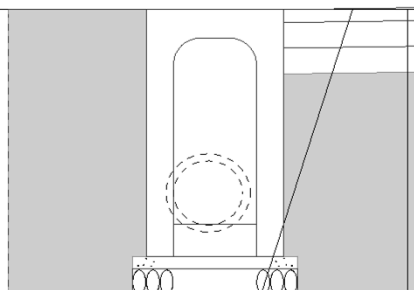


埋戻 = 1.0

SECT 20. 6

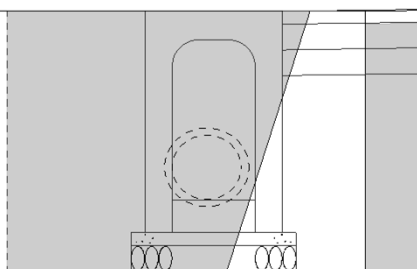


床堀 = 1.2

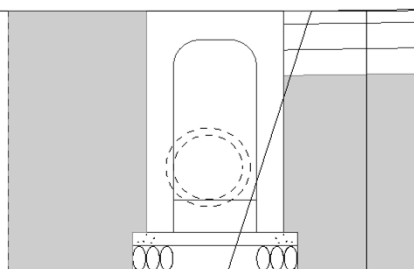


埋戻 = 0.9

SECT 20. 6

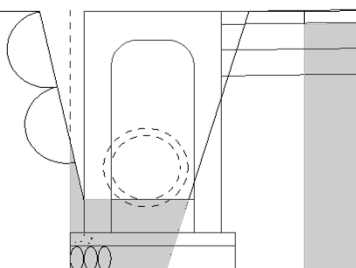



床堀 = 0.3

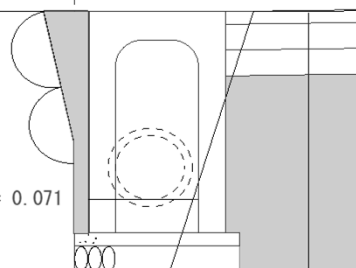


間詰コンクリート = 0.071

埋戻 = 0.4

SECT 33.0 (終点側)

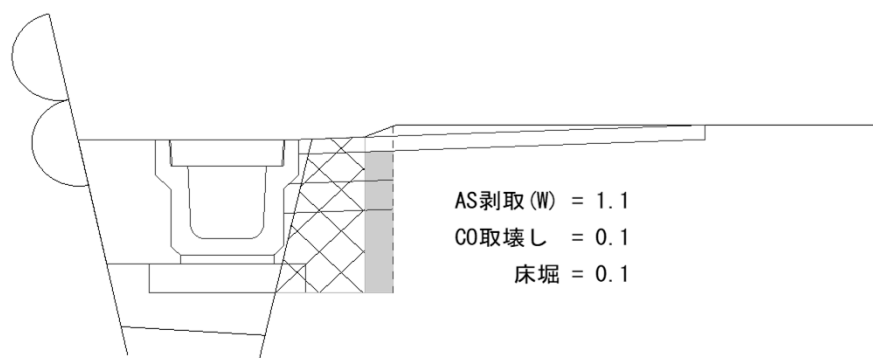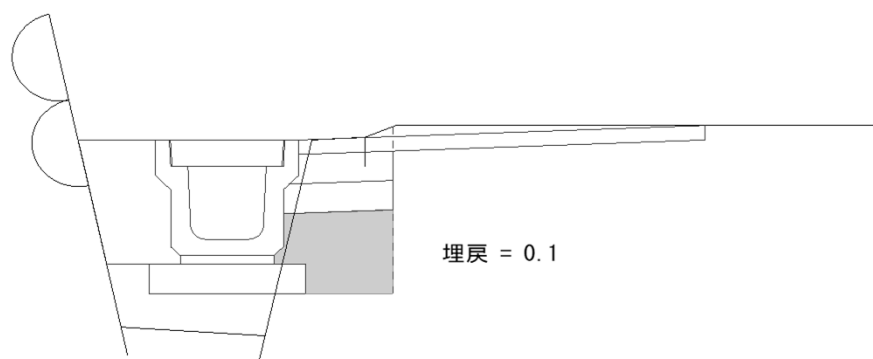

SECT 33.0 (起点側)

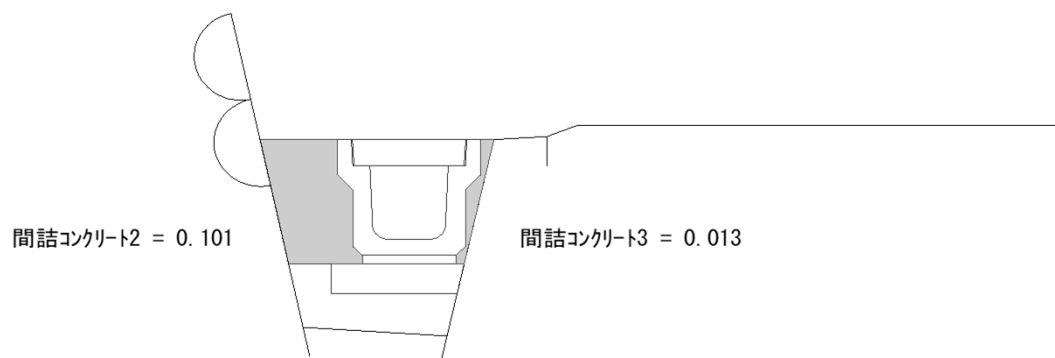

計 第 2-1 表 水 路 工 (自由勾配側溝) 延 長 調 書								
300-400 L=1.00m			300-400 L=2.00m			300-400 L=(1.40/1.43)m		
測 点	延長(m)	備 考	測 点	延長(m)	備 考	測 点	延長(m)	備 考
SECT7.6付近			SECT7.6付近			SECT7.6付近		
							1.42	
				2.00				
SECT11.0	1.00		SECT11.0			SECT11.0		
	1.00			2.00			1.42	

計 第 2-2 表 水 路 工 (自由勾配側溝) 延 長 調 書								
300-500 L=1.00m			300-500 L=2.00m			300-500 L=(1.62/1.68)m		
測 点	延長(m)	備 考	測 点	延長(m)	備 考	測 点	延長(m)	備 考
SECT0.6付近			SECT0.6付近					
	1.00							
				2.00				
				2.00		SECT12.0付近		
SECT7.6付近			SECT7.6付近	2.00			1.65	
			SECT12.0付近			SECT15.6付近		
	1.00			6.00			1.65	

計 第 2-3 表 水 路 工 (自由勾配側溝) 延 長 調 書								
300-500 L=(1.94/2.00)m			300-600 L=2.00m			300-700 L=1.00m		
測 点	延長(m)	備 考	測 点	延長(m)	備 考	測 点	延長(m)	備 考
SECT12.0付近			SECT15.6付近			SECT19.6付近		
				2.00			1.00	
	1.97		SECT19.6付近	2.00		SECT22.6付近		
SECT15.6付近								
	1.97			4.00			1.00	

計 第 2-4 表 水 路 工 (自由勾配側溝) 延 長 調 書								
300-700 L=2.00m			300-800 L=2.00m			自由勾配側溝(300)合計		
測 点	延長(m)	備 考	測 点	延長(m)	備 考	測 点		備 考
SECT19.6付近			SECT22.6付近			300-400 L=1.00	1.00	
						〃 L=2.00	2.00	
SECT22.6付近	2.00		SECT24.6付近	2.00		〃 L=1.42	1.42	
						300-500 L=1.00	1.00	
						〃 L=2.00	6.00	
						〃 L=1.65	1.65	
						〃 L=1.97	1.97	
						300-600 L=2.00	4.00	
						300-700 L=1.00	1.00	
						300-700 L=2.00	2.00	
						300-800 L=2.00	2.00	
	2.00			2.00			24.04	

計 第 2-5 表			水 路 工(自由勾配側溝附帯)			延 長 調 書		
インバートコンクリート			均しコンクリート・基礎碎石					
測 点	立積(m3)	備 考	測 点	延長(m)	備 考	測 点		備 考
			SECT0.6					
			SECT11.0	10.4				
構造計算書より			SECT24.6	13.6				
	0.686							
	0.686			24.00				

計 第 2-6 表			水 路 工(自由勾配側溝附帯)			延 長 調 書		
コンクリート蓋(VS300用) L0.5			グレーチング蓋(VS300用) L0.5					
測 点	枚	備 考	測 点	枚	備 考	測 点		備 考
SECT0.6			SECT0.6					
SECT11.0	7		SECT11.0	2				
SECT24.6	10		SECT24.6	2				
	17			4				

構造図 図面番号2/4参照

10m当り

名 称	規 格	仕 様 ・ 算 式	単位当り数量	延長・箇所	数 量
自由勾配側溝	300×400	L=1.0m	0 417	24 0	1.0 本
〃	〃	L=2.0m	0 417	24 0	1.0 本
〃	〃	L=(1.40/1.43)	0 417	24 0	1.0 本
〃	300×500	L=1.0m	0 417	24 0	1.0 本
〃	〃	L=2.0m	1 251	24 0	3.0 本
〃	〃	L=(1.62/1.68)	0 417	24 0	1.0 本
〃	〃	L=(1.94/2.00)	0 417	24 0	1.0 本
〃	300×600	L=2.0m	0 833	24 0	2.0 本
〃	300×700	L=1.0m	0 417	24 0	1.0 本
〃	〃	L=2.0m	0 417	24 0	1.0 本
〃	300×800	L=2.0m	0 417	24 0	1.0 本
インバートコンクリート	18N/mm ²	0.686m ³ (24m ¹ 式)	0 286	24 0	0.686 m ³
均しコンクリート	18N/mm ²	t=5cm 0.60*10	6 000	24 0	14.400 m ²
均し型枠	一般	(0.05+0.05)*10	1 000	24 0	2.40 m ²
基礎砕石	RC-40	t=10cm 0.60*10	6 000	24 0	14.400 m ²
コンクリート蓋	T-25	19枚 (24m ¹ 式)	0 7083	24 0	17.0 枚
グレーチング蓋	T-25	4枚 (24m ¹ 式)	1 667	24 0	4 枚


F

S=1:20

S=1 : 20

S=1:20

(T25-B250)



種 別	規 格	単位	数 量
ﾌﾟﾚｷﾞｻﾞｰｽﾄ側溝	PU3-B250-H250	個	5.000
敷モルタル	1 : 3	m3	0.090
目地モルタル	1 : 3	m3	0.002
基礎砕石	RC-40 t=100	m2	5.000
ｺﾝｸﾘｰﾄ蓋	PC4-B250	枚	16.0
ｸﾞﾚｰﾃﾞﾝｸﾞ 蓋	T-25 L=1.0m	枚	2.0

10m 当り


[illegible]

計 第 4-1 表			擁 壁 工			延 長 調 書		
継手工			コンクリート復旧			止水壁		
測 点	箇所	備 考	測 点	箇所	備 考	測 点	箇所	備 考
SECT0.0付近	1.0		SECT24.5付近	1.0		SECT49.0付近	1.0	
	1.0			1.0			1.0	

計 第 4-2 表			擁 壁 工			延 長 調 書		
埋戻コンクリート								
測 点	箇所	備 考	測 点		備 考	測 点		備 考
SECT25.6付近	1.0							
	1.0							

(SECT 0.0 断面図)

(SECT 0.6 断面図)

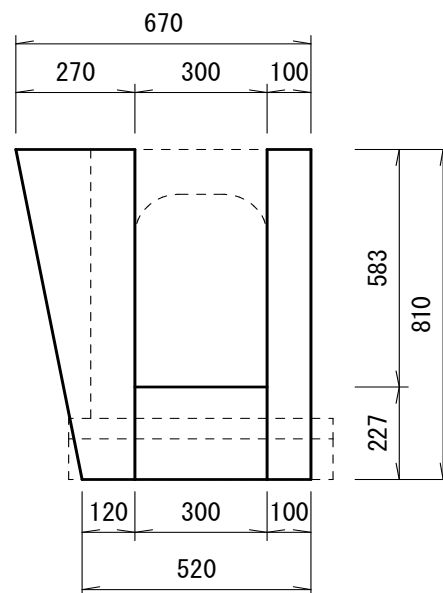

體積：(0.345835+0.30705)÷2×0.60 = 0.1958655m³

1箇所当り

$$\begin{aligned} & (0.824+0.810) \div 2 \times (0.658+0.690) \\ & + 0.810 \times 0.600 + (0.330+0.481) \div 2 \times 0.810 \\ & + (0.270+0.120) \div 2 \times 0.810 + 0.100 \times 0.810 \\ & = 2.154721 \text{ m}^2 \end{aligned}$$

種 別	規 格	単位	数 量
コンクリート	18N/mm2	m3	0.20
型 枠		m2	2.2


1箇所当り

[illegible]

埋戻コンクリート

S=1 : 20

(SECT 25.6 付近)

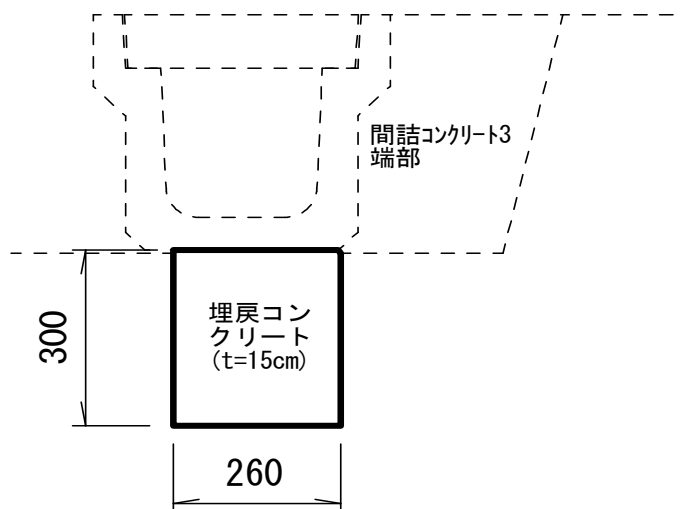

コンクリート（埋戻コンクリート用）

$$0,300 \times 0,260 \times 0,150 = 0,0117 \text{ m}^3$$

型 枠 (埋戻コンクリート用)

$$0.300 \times 0.260 \times 2 = 0.156\text{m}^2$$

1箇所当り

[illegible]

計 第 5 表 間詰コンクリート 計 算 書												
測 点	間詰コンクリート1				間詰コンクリート2				間詰コンクリート3			
	距離(m)	断 面	平 均	立積(m³)	距離(m)	断 面	平 均	立積(m³)	距離(m)	巾	平 均	平積(m²)
SECT0.6		0.082										
SECT11.0	10.4	0.155	0.1185	1.232								
SECT20.6	9.6	0.071	0.1130	1.085								
SECT25.9						0.083						
SECT28.0					2.1	0.083	0.0830	0.174				
SECT33.0					5.0	0.101	0.0920	0.460				
SECT49.0					16.0	0.078	0.0895	1.432				
SECT25.6										0.102		
SECT28.0									2.4	0.030	0.0660	0.158
SECT33.0									5.0	0.013	0.0215	0.108
									構造図より			
									型枠 (SECT25.6付近)			
									0.102m2			
小計	20.0			2.317	23.1			2.066	7.4			0.266
合計	40.0			4.634								

計 第 6 表					舗装工				計 算 書			
測 点	W1:表層工				W2:上層路盤工				W3:下層路盤工			
	距離(m)	巾	平 均	平積(m ²)	距離(m)	巾	平 均	平積(m ²)	距離(m)	巾	平 均	平積(m ²)
SECT0.0		1.5				0.5				0.5		
SECT11.0	11.0	1.5	1.50	16.5	11.0	0.5	0.50	5.5	11.0	0.5	0.50	5.5
SECT24.4 付近	13.4	1.5	1.50	20.1	13.4	0.5	0.50	6.7	13.4	0.5	0.50	6.7
SECT33.0 付近		1.3				0.3				0.3		
SECT49.0	16.0	1.3	1.30	20.8	16.0	0.3	0.30	4.8	16.0	0.3	0.30	4.8
										</		

計 第 7 表 取壊し工 計 算 書												
測 点	コンクリート取壊し				舗装剥取り				カッター切断工(AS)			
	距離(m)	断面	平 均	立積(m³)	距離(m)	巾	平 均	平積(m²)	距離(m)	巾		延 長
SECT0.0		0.3				1.6				1.6		1.6
SECT11.0	11.0	0.3	0.30	3.3	11.0	1.7	1.65	18.2	11.0			11.0
SECT24.4 付近	13.4	0.4	0.35	4.7	13.4	1.0	1.35	18.1	13.4	1.0		14.4
SECT33.0 付近		0.1				1.1				1.1		1.1
SECT48.0	16.0	0.1	0.10	1.6	16.0	1.4	1.25	20.0	16.0	1.4		17.4
SECT24.6 付近	コンクリート 復旧箇所			0.07								
SECT20.6 付近	HP250 L=4.0m (2本) 130kg×2=260kg											
SECT24.6 付近												
合計	40.4			9.7	40.4			56.3	40.4			45.5